

# LiS 3150 M LITRONIK Li-Manganese Dioxide Medium Rate Battery

#### **KEY FEATURES**

- For implantable devices with medium pulse power demand
- Very high power densities
- Direct power supply of telemetric units
- Low self-discharge rates
- No voltage delays






## LiS 3150 M

# Lithium-Manganese Dioxide Medium Rate Battery





#### **Technical Data**

Chemistry	Li-Mn02
Construction	Stacked electrode design
Rated capacity (at 100 kΩ	1.2 Ah
Energy density	947 mWh/cm³
Nominal voltage	3.2 V
Cut-off voltage	2.3 V
Pulse capacity	1.12 Ah
Rated pulse current	20mA
Self-discharge (at 37°C)	< 1% per year
Mass	12 g
Volume	3.68 cm³
Case material	1,4306 (X2 CrNi 19.11) hermetically sealed
Case polarity	Negative
Safety feature	Shut down separator
Typical application	Implantable pulse generator with telemetric functionalities










### **Options**

Custom pin configuration	available
Application specific testing	available
Custom labeling	available
Custom packaging	available

#### LiS 3150 M / Discharge at 100kOhm; pulse load 20mA, 2s (without self discharge)

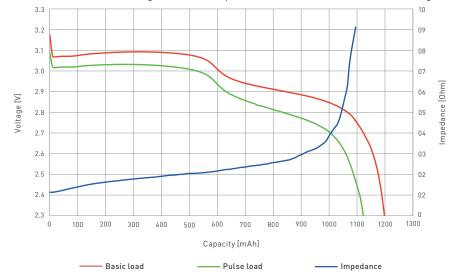

LITRONIK power sources provide today's state-of-the-art in battery technology for implantable medical devices. The batteries are manufactured within a tightly controlled atmosphere to ensure highly re-producible electrical characteristics. A completely laser welded titanium case and a high-precision metal-to-glass feedthrough guarantee hermeticity and safe operation. LITRONIK's quality system derives from the require-ments of life sustaining implants and assures 100% traceability of processes and materials.



an MST company



LITRONIK Batterietechnologie GmbH Birkwitzer Straße 79 DE-01796 Pirna, Germany Phone +49 (3501) 5305-0 info.litronik@mst.com www.mst.com



### Micro Systems Technologies

engineering for life

Micro Systems Technologies Management GmbH Sieversufer 7-9 DE-12359 Berlin, Germany Phone +49 (30) 68905-4001 info@mst.com www.mst.com